

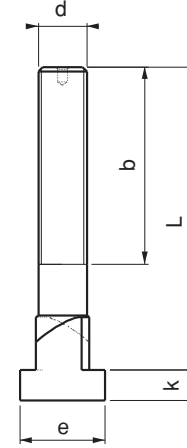


Referans Nr.	dx  x L	b	a	e	k	Sıkma Verileri Tightening Data			
						Nm	kN		
1650-1214050	M12x14	x50	35	13.7	22	8	141	74	70
1650-1214080		x80	55						100
1650-1214125		x125	75						120
1650-1618063	M16x18	x63	45	17.7	28	10	354	138	160
1650-1618100		x100	65						220
1650-1618160		x160	100						280
1650-2022080	M20x22	x80	55	21.7	35	14	679	215	330
1650-2022125		x125	85						430
1650-2022200		x200	120						570
1650-2428100	M24x28	x100	70	27.7	44	18	1163	310	650
1650-2428125		x125	85						770
1650-2428250		x250	150						1150




Ürün Nr. 1650 Dereceli T-Ayaklı Saplama

- T-Kanal pleytlerde üstten T-Kanala girip bağlama özelliği vardır
- Kalite 12.9
- Siyah kaplama

Product Nr. 1650 Graded T-Slot Bolt

- In T-Slot plates it has the feature of making the coupling by entering T-Slot the top.
- Quality 12.9
- Black coating



Not: 150 °C üzerindeki ortamlarda sıkma işlemi yapılırken dişlerin üzerine Loctite 8150 kullanılır.



Loctite
8150

Note: Environments on the 150 °C when clamping action on the thread Loctite 8150 is used.