



| Referans Nr. | | c | L | b | b1 | n | n1 | n2 | k | k1 | k2 | sw | i | h | h1 | d | d1 | sıkma kuvveti clamping force Kgf | Tork Değeri Allowable Screw Torque (N-m) | |
|--------------|----|----|-----|----|----|----|------|------|----|----|----|----|----|----|----|-----|-----|--|--|------|
| 2070-14 | 14 | 10 | 142 | 24 | 8 | 37 | 12.5 | 18.5 | 65 | 54 | 26 | 6 | 65 | 23 | 10 | M12 | M12 | 850 | 15 | 3575 |
| 2070-16 | 16 | | | | | | | | | | | | | | | | | | | 3710 |
| 2070-18 | 18 | | | | | | | | | | | | | | | | | | | 5215 |
| 2070-20 | 20 | 14 | 145 | 28 | 10 | 48 | 12.5 | 18.5 | 74 | 56 | 26 | 8 | 65 | 28 | 11 | M12 | M12 | 1000 | 35 | 5400 |
| 2070-22 | 22 | | | | | | | | | | | | | | | | | | | 5610 |

Ürün Nr. 2070 Kızaklı Yandan Bağlama Set

- Hareketli çenenin kızaklı yapısından dolayı iş parçasını dayama ve pleyt yönüne sıkır. Çenenin geniş hareketi iş parçasını bağlama ve sökme kolaylık sağlar.
- DIN 650 T-Kanala uyumludur
- Çene Sertlik : Sertleştirilmiş
- Siyah kaplama
- Plastik kutuda set

Product Nr. 2070 Sliding Side Wrench Set

- Because of the sliding structure of the moving jaw it clamps the work piece in the direction of resting and plate.
- Wide movement of the jaw provides convenience in coupling and dismantling of the workpiece.
- It is in compliance with DIN 650 T-Slot
- Hardness of jaw: Hardened
- Black coating
- Set is in the plastic box

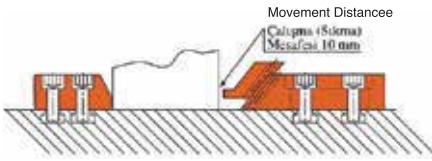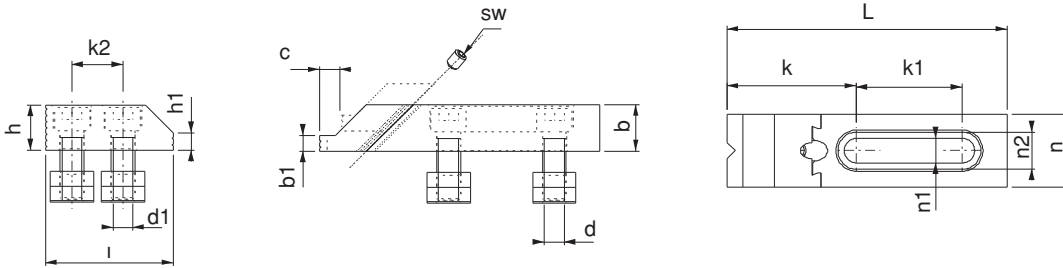

Not: Sabit dayamanın dereceli tarafı ince parçalar, düz tarafı ise kalın parçalarda kullanılmak üzere iki farklı şekilde kullanılabilir.

Note: Fixed rest can be used as two different ways: Graded side is used for thin pieces and the Straight side is used with thick pieces.



Set İçindekiler / The set consists of

| Parça Part | | | | | |
|---------------|---|---|---|---|---|
| Adet Quantity | 2 | 2 | 8 | 8 | 1 |

Kızaklı Yandan Bağlama Gövde

Sliding Side Wrench Body

| Referans Nr. | |
|--------------|----|
| 2075-14 | 14 |
| 2075-16 | 16 |
| 2075-18 | 18 |
| 2075-20 | 20 |
| 2075-22 | 22 |
| 2075-24 | 24 |
| 2075-28 | 28 |



Kızaklı Yandan Bağlama Dayama

Sliding Side Wrench Pluggable

| Referans Nr. | |
|--------------|----|
| 2040-14 | 14 |
| 2040-16 | 16 |
| 2040-18 | 18 |
| 2040-20 | 20 |
| 2040-22 | 22 |
| 2040-24 | 24 |
| 2040-28 | 28 |

Not: Sabit dayamanın dereceli tarafı ince parçalar, düz tarafı ise kalın parçalarda kullanılmak üzere iki farklı şekilde kullanılabilir.

Note: Fixed rest can be used as two different ways: Graded side is used for thin pieces and the Straight side is used with thick pieces.

