

Referenz-Nr. Order No.	Temperatur bis zu Temp. up to	Zylinder Piston Ø D (mm)	Kolbenstange Piston Rod Ø (mm)	Zug bei 100 bar Force to pull at 100 bar (kgf)	Zug bei 500 bar Force to pull at 500 bar (kgf)	Federückstellung Spring return force, min. (N)	Ölvolumen pro 10 mm Hub Oil volume per 10 mm stroke (cm ³)	a (mm)	b (mm)	c (mm)	f (mm)	g (mm)	h (mm)	k (mm)	m (mm)	n (mm)	o	p	r (mm)	s (mm)	t (mm)	SW (mm)	Hub Stroke ± 1 (mm)	l ± 1 (mm)	Gewicht Weight (kg)
1057-010016	100 °C	16	10	110	600	40	1.22	60	35	22	30	6.5	30	17.5	16.5	11	M6x12	G1/4	-	40	22	8	8	78	0.8
1057-015016	150 °C																								
1057-010025	100 °C	25	16	270	1430	140	2.90	65	45	27	50	8.5	33	22.5	18	11	M10x15	G1/4	-	50	30	13	8	91	1.2
1057-015025	150 °C																								
1057-010032	100 °C	32	20	460	2420	195	4.90	75	55	35	55	10.5	38	27.5	22	11	M12x15	G1/4	-	55	35	17	10	110	1.8
1057-015032	150 °C																								
1057-010040	100 °C	40	25	730	3790	270	7.65	85	63	35	63	10.5	40	31.5	24	11	M16x25	G1/4	4	63	40	-	10	114	2.6
1057-015040	150 °C																								
1057-010050	100 °C	50	32	1100	5730	440	11.60	100	75	35	76	13	44	37.5	27	13	M20x25	G1/4	4	76	45	-	12	125	3.8
1057-015050	150 °C																								
1057-010063	100 °C	63	40	1790	9230	430	18.60	125	95	44	95	17	50	47.5	26	17	M27x40	G1/2	4	95	65	-	12	146	6.7
1057-015063	150 °C																								
1057-010080	100 °C	80	50	2920	15180	760	30.63	160	120	46	120	21	60	60	34	21	M30x40	G1/2	5	120	80	-	12	193	12.8
1057-015080	150 °C																								
1057-100100	100 °C	100	63	4560	23500	1200	47.36	200	150	55	158	25	64	75	35	25	M42x60	G1/2	6	158	108	-	12	185	24
1057-150100	150 °C																								

1057


- Toleranzen für Längen- und Winkelmaße nach DIN 7168-m
- Tolerances for length and angle dimensions as per DIN 7168-m

wichtige Hinweise

Wenn die Möglichkeit besteht, dass aggressive Schneid- und Kühlmittel durch den Sintermetallluftfilter in das Zylinderinnere eindringen, muss ein Entlüftungsschlauch verbunden und in einer geschützten Position angeordnet sein.




Important notes

If there is a possibility that aggressive cutting lubricants and coolants penetrate through the sintered metal air filter into the cylinder's interior, a vent hose has to be connected and be placed in a protected position.

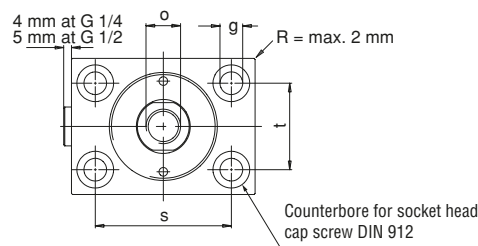

Die Zylinder müssen vorn getragen werden, um zu funktionieren. Druck über 250 bar

Cylinders must be supported at the front for operating pressures exceeding 250 bar

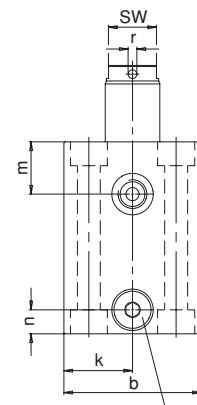

Entlüftung mit Stopfen mit Sintermetall-Luftfilter
Bleeding by plug with sintered metal air filter