


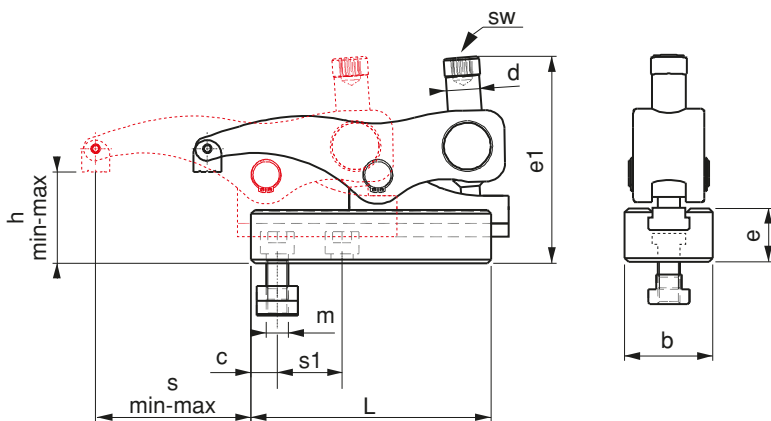


| Referans Nr. | a | m | h | | s | s1 | e1 | d | sw | L | e | b | c | Sıkma Kuvveti Clamping Force Kgf |  (g) | |
|--------------|----|-----|-----|-----|-------|------|-----|-----|---|-----|-----|----|------|----------------------------------|---|------|
| | | | min | max | | | | | | | | | | | | |
| 1150-118 T | 18 | M16 | 0 | 65 | 18-96 | 35 | 125 | M20 | 12 | 140 | 43 | 55 | 19.5 | 2500 | 4410 | |
| 1150-120 T | 20 | M16 | 0 | 65 | 18-96 | 35 | 125 | M20 | 12 | 140 | 43 | 55 | 19.5 | 2500 | 4460 | |
| 1150-122 T | 22 | M16 | 0 | 65 | 18-96 | 35 | 125 | M20 | 12 | 140 | 43 | 55 | 19.5 | 2500 | 4515 | |
| 1150-124 T | 24 | M16 | 0 | 65 | 18-96 | 35 | 125 | M20 | 12 | 140 | 43 | 55 | 19.5 | 2500 | 4620 | |
| 1150-128 T | 28 | M16 | 0 | 65 | 18-96 | 35 | 125 | M20 | 12 | 140 | 43 | 55 | 19.5 | 2500 | 4725 | |
| | | | | | | | | |   | | | | | | | |
| 1160-222 T | 22 | M20 | 20 | 80 | 17-92 | 41.5 | 175 | M24 | 12 | 24 | 178 | 55 | 74 | 24 | 5500 | 9030 |
| 1160-224 T | 24 | M20 | 20 | 80 | 17-92 | 41.5 | 175 | M24 | 12 | 24 | 178 | 55 | 74 | 24 | 5500 | 9120 |
| 1160-228 T | 28 | M24 | 20 | 80 | 17-92 | 41.5 | 175 | M24 | 12 | 24 | 178 | 55 | 74 | 24 | 5500 | 9180 |
| 1160-236 T | 36 | M24 | 20 | 80 | 17-92 | 41.5 | 175 | M24 | 12 | 24 | 178 | 55 | 74 | 24 | 5500 | 9600 |

Product Nr. 1150-1160 Combined Sliding Clamp

• **Nr. 1150** (a) 18-28 is used in T-Slot and M16 imbus bolt is used with DIN 508 T-Nut. Height clamping gap of the piece is 0-65mm, back-and- forth movement distance is 78mm. Clamping force is 2500 kgf.

• **Nr. 1160** (a) 22-36 is used in T-Slot and M20-M24 imbus bolt is used with DIN 508 T-Nut. Height clamping gap of the piece is 20-80mm, back-and- forth movement distance is 73mm. Clamping force is 5500 kgf.


APPLICATION;

- 1- Slide cradle is brought to suitable form with the work piece and then it is fixed
- 2- Upper body is driven to the slide and it is brought to desired position
- 3- Work piece is fixed with the imbus bolt of the clamp
- 4- Then the work piece becomes ready to be machined.

Area of Use

Injection Machines, Presses, Milling Machines, Drilling Machines and various Industrial Machines

