

Referenz-Nr. Order No.	P(N)	D	H (0 -1)	D1	H1	A Bewegung Travel	d ($+0.1$ 0)	 (g)
1473-06001	76	10	11	6	10.7	1	10	4
1473-08001	102	12	13	8	13.9	1.3	12	8
1473-10001	204	16	17	10	16.7	1.6	16	16



1473

Eigenschaft

- Ideal für temporäres Spannen.

Hinweis



- Min. P-Wert für Stiftbewegung
- bis 90 °C

Features

- Ideal for temporary clamping of low-profile workpieces.


Note

- The stated value "P" denotes the minimum force needed to move the pin.
- Heat resistance : 90 °C



Montage-Bohrung
Installation Hole

Anwendung / How To Use

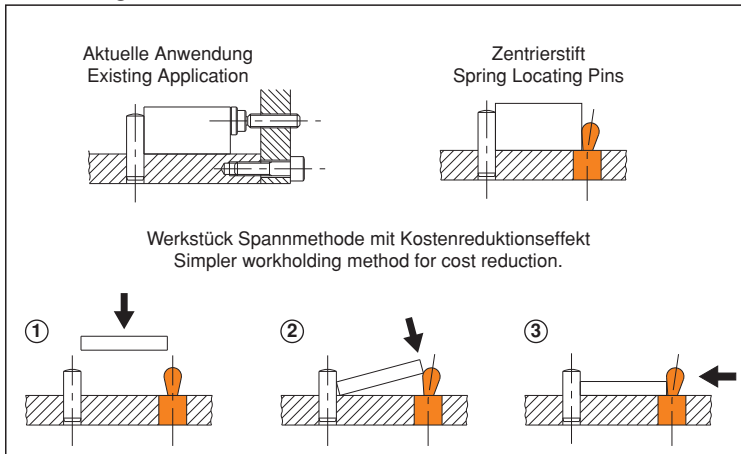

Anwendungsbeispiel / Application Examples

