

Referenz-Nr. Order No.		c	L	b	b1	n	n1	n2	k	k1	k2	sw	i	h	h1	d	d1	sıkma kuvveti clamping force Kgf	Tork Degeri Allowable Screw Torque (N-m)	
2070-14	14	10	142	24	8	37	12.5	18.5	65	54	26	6	65	23	10	M12	M12	850	15	3575
2070-16	16																			3710
2070-18	18	14	145	28	10	48	12.5	18.5	74	56	26	8	65	28	11	M12	M12	1000	35	5215
2070-20	20																			5400
2070-22	22																			5610


2070

- Durch die Gleitstruktur der beweglichen Backe spannt sie das Werkstück in Richtung Auflage und Platte. Die breite Bewegung der Backe bietet Komfort beim Spannen und Entspannen des Werkstücks.
- geeignet für T-Nut DIN 650
- Gehärtete Backen
- Schwarz beschichtet
- Set in Plastikbox




2070

- Because of the sliding structure of the moving jaw it clamps the work piece in the direction of resting and plate. Wide movement of the jaw provides convenience in coupling and dismantling of the workpiece.
- It is in compliance with DIN 650 T-Slot
- Hardness of jaw: Hardened
- Black coating
- Set is in the plastic box

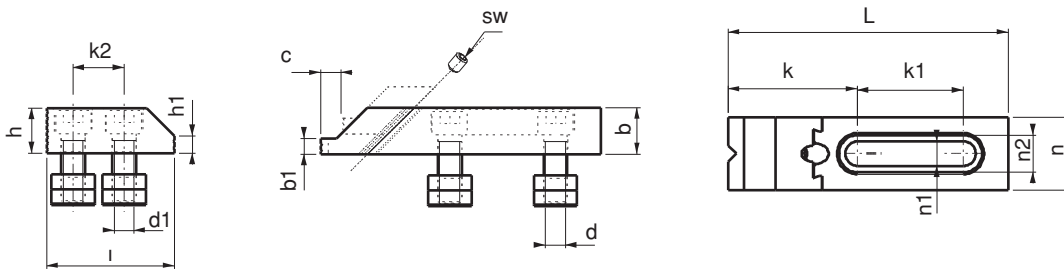

Set-Inhalt / The set consists of						
Teil Part						
Menge Quantity	2	2	8	8	2	1

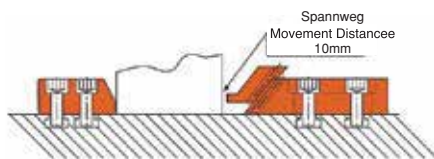

Die Winkelauflegefläche ist für dünne Werkstücke und die gerade Fläche für dicke Werkstücke.

Note: Fixed rest can be used as two different ways: Graded side is used for thin pieces and the Straight side is used with thick pieces.

