

Referans Nr.		m	h min max	s	e1	e2	d	SW	L	b	e3	c	 (g)
1150-118 DT	18	M16	48 113	18-96	173	90	M20	12	140	55	48	19.5	6625
1150-120 DT	20	M16	48 113	18-96	173	90	M20	12	140	55	48	19.5	6690
1150-122 DT	22	M20	48 113	18-96	173	90	M20	12	140	55	48	19.5	6750
1150-124 DT	24	M20	48 113	18-96	173	90	M20	12	140	55	48	19.5	6840
1150-128 DT	28	M20	48 113	18-96	173	90	M20	12	140	55	48	19.5	6960
1150-118 LDT	18	M16	48 113	18-128	173	90	M20	12	200	55	48	19.5	8770
1150-120 LDT	20	M16	48 113	18-128	173	90	M20	12	200	55	48	19.5	8830
1150-122 LDT	22	M20	48 113	18-128	173	90	M20	12	200	55	48	19.5	8885
1150-124 LDT	24	M20	48 113	18-128	173	90	M20	12	200	55	48	19.5	8985
1150-128 LDT	28	M20	48 113	18-128	173	90	M20	12	200	55	48	19.5	9000

Ürün Nr. 1150-(DT) Alt Destekli

- M16 İmbus civata DIN 508 T-Pabuçla kullanılır.
- Parça yükseklik sıkma aralığı 48-113mm
- İleri-geri hareket mesafesi 78mm'dir. Sıkma Kuvveti 2500 kgf.

Ürün Nr. 1150-(LDT) Alt Destekli

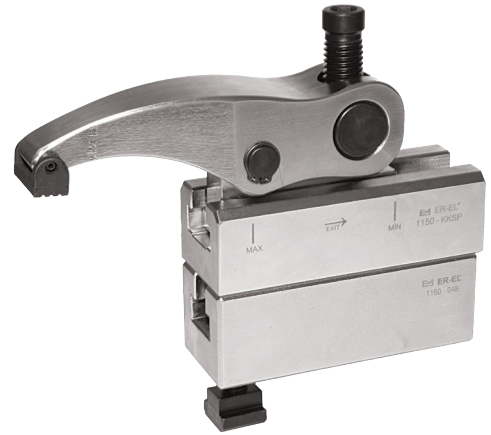
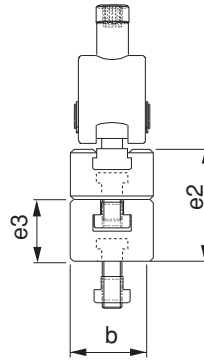
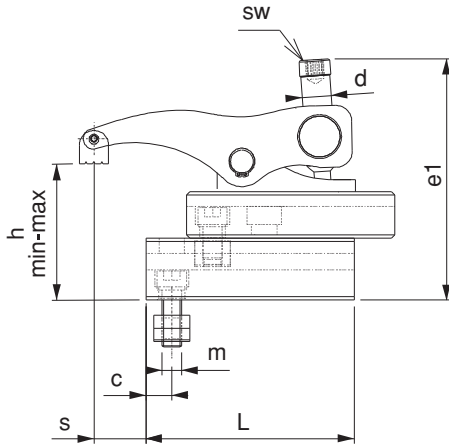
- M16 İmbus civata DIN 508 T-Pabuçla kullanılır.
- Parça yükseklik sıkma aralığı 48-113mm
- İleri-geri hareket mesafesi 110mm'dir. Sıkma Kuvveti 2500 kgf.

Product Nr. 1150-(DT) Bottom Supported

- M16 imbus bolt is used with DIN 508 T-Nut.
- Height clamping gap of the piece is 48-113mm
- back-and- forth movement distance is 78mm. Clamping force is 2500 kgf.

Product Nr. 1150-(LDT) Bottom Supported

- M16 imbus bolt is used with DIN 508 T-Nut.
- Height clamping gap of the piece is 48-113mm
- back-and- forth movement distance is 110mm. Clamping force is 2500 kgf.


UYGULAMA;

- 1- Alt desteği iş parçasına uygun şekle getir sabitle
- 2- K.K.S.P destekler artırılarak istenilen mesafeye ulaşılır
- 3- K.K.S.P imbus civata ile T-Pabuca karşılık T-Kanala tak istenilen pozisyona getir.
- 4- Pabuç imbus civatasıyla iş parçasını sabitle

APPLICATION

- 1- Bottom support is brought to suitable form with the work piece and then it is fixed.
- 2- Desired distance is reached by increasing K.K.S.P supports
- 3- K.K.S.P is applied in T-Slot with imbus bolt against T-Nut
- 4- Work piece is fixed with the imbus bolt of the clamp

