

Referans Nr.	d x L	b1	b	Sıkma Verileri Tightening Data		
				Nm	kN	(g)
1690-08040	M8	11	20	36	27	10
1690-08063			40			15
1690-08080			50			20
1690-08100			63			30
1690-08125			75			35
1690-08160			100			45
1690-10050	M10	13	25	67	43	20
1690-10063			32			25
1690-10080			50			35
1690-10100			63			45
1690-10125			75			55
1690-10160			100			70
1690-10200			125			95
1690-12050	M12	15	25	120	63	35
1690-12063			32			40
1690-12080			50			55
1690-12100			63			70
1690-12125			75			90
1690-12160			100			115
1690-12200			125			140
1690-14063	M14	17	32	191	86	60
1690-14080			50			75
1690-14100			63			95
1690-14125			75			120
1690-14160			100			150
1690-14200			125			195
1690-14250			160			240
1690-16063	M16	19	32	302	118	85
1690-16080			50			105
1690-16100			63			130
1690-16125			75			160
1690-16160			100			205
1690-16200			125			260
1690-16250			160			325
1690-16315			180			405
1690-16500			315			650
1690-18080	M18	23	50	405	144	130
1690-18100			60			160
1690-18125			75			200
1690-18160			100			260
1690-18200			125			320
1690-18250			150			400
1690-18315			180			510
1690-20080	M20	27	32	580	184	155
1690-20100			60			200
1690-20125			70			250
1690-20160			100			330
1690-20200			125			400
1690-20250			160			510
1690-20315			200			640
1690-20400			250			815
1690-20500			315			1020
1690-22100	M22	31	45	772	228	250
1690-22125			70			305
1690-22160			100			400
1690-22200			125			500
1690-22250			160			620
1690-22315			180			780
1690-22400			250			1010
1690-24100	M24	35	45	994	265	290
1690-24125			70			365
1690-24160			100			470
1690-24200			125			580
1690-24250			160			730
1690-24315			200			920
1690-24400			250			1170
1690-24500			315			1470
1690-24630			315			1860
1690-30125	M30	43	56	1930	421	570
1690-30200			125			910
1690-30250			160			1150
1690-30315			200			1435
1690-30500			315			2315
1690-30700			400			3215
1690-301000			400			4700


Referans Nr.	d x L	b1	b	Sıkma Verileri Tightening Data		
				Nm	kN	(g)
1690-36160	M36	51	80	3378	614	1100
1690-36200			125			1340
1690-36250			160			1710
1690-36315			200			2150
1690-36400			250			2700
1690-36500			315			3450
1690-36700			400			4750
1690-42315	M42	59	200	5415	843	2950
1690-42400			250			3750
1690-42500			315			4690

DIN 6379
Ürün Nr. 1690 Düz Saplama

- Kalite 10.9
- Siyah kaplama

Product Nr. 1690 Straight Stud

- Quality 10.9
- Black coating

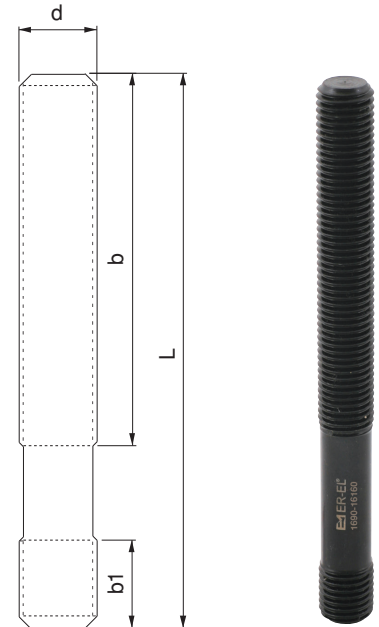

Not: 150 °C üzerindeki ortamlarda sıkma işlemi yapılırken dişlerin üzerine Loctite 8150 kullanılır.

Note: Environments on the 150 °C when clamping action on the thread Loctite 8150 is used.

